

Duraflex - Hyppylauta alusta




The DURAFIRM Short-Stand, consisting of the Diving Stand Anchor and the Fulcrum Assembly, is constructed for mounting on a concrete, steel, stainless-steel or other field fabricated diving platform.

Castings: heavy aluminum coated with epoxy

Mechanical parts: heat treated extruded aluminum, hard anodized, replaceable slide made from nylon

Design tensile strength: 35.000 psi

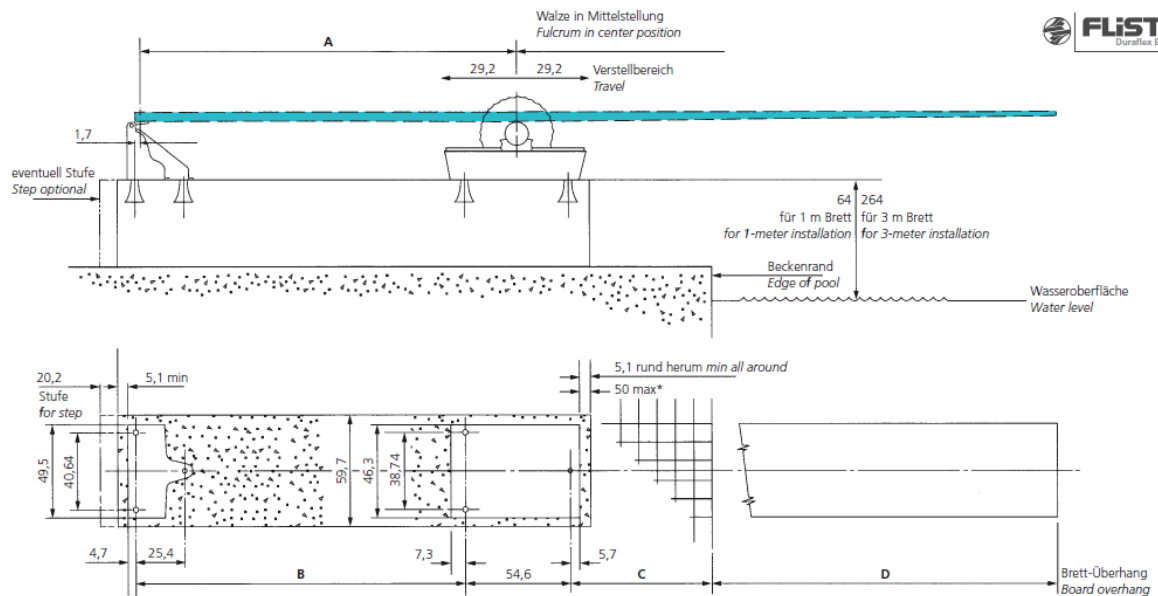

Alle Maße in cm
All dimensions shown in centimeters (cm)

	DURAFLEX 14 ft. 426,7 cm	DURAFLEX 16 ft. 487,7 cm	MAXI B 16 ft. 487,7 cm
A	160,7 cm	198,8 cm	184,8 cm
B	135,9 cm	174,0 cm	160,0 cm
C	53,3 cm	76,2 cm	91,4 cm
D	183,0 cm	183,0 cm	ca. 183,0 cm



Achtung:
Falls die Plattform oder der Sockel bündig mit dem Beckenrand ist, reduziert sich das Maß C auf 50 cm Maximum.

* Der Betreiber muss überprüfen, ob die Sicherheitsmaße eingehalten werden, wenn der Überhang des Sprungbrettes länger ist. Siehe Seite 32

Note:
C dimension decreases to 50 cm if platform is vertically plump with pool edge, and board overhang increases correspondingly.

* Contractor must see that diving well will meet minimum depth ahead of board if overhang is increased. See page 32