


Pumput - Badu Magic

Characteristics BADU MAGIC
applicable for water of 20°C

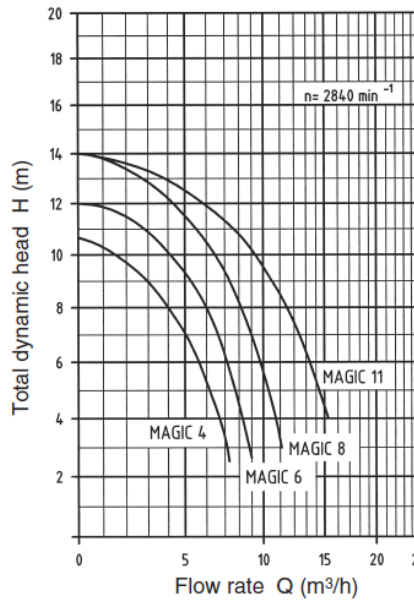

KL 91.40.009

Technical data at 50 Hz		BADU MAGIC 4	BADU MAGIC 6	BADU MAGIC 8	BADU MAGIC 11
Inlet / outlet, d (mm)		*)	*)	*)	*)
Recommended inlet/outlet pipe, PVC pipe, d (mm)		50/40	50/40	50/50	50/50
hose		1 1/2" / 1 1/4"	1 1/2" / 1 1/4"	1 1/2" / 1 1/2"	1 1/2" / 1 1/2"
Power input P ₁ (kW)	1~230 V	0,35	0,45	0,60	0,70
Power output P ₂ (kW)	1~230 V	0,18	0,25	0,40	0,45
Rated current (A)	1~230 V	1,95	2,30	2,70	3,20
Weight (kg)		5,9	7,3	8,3	8,3

*) Special union with glue socket d = 50 and hose nozzle for 1 1/4" and 1 1/2" hose respectively

Dimensional Drawing

Dimensions in mm

